



Semi-Automatic Stretch Wrapper

MASTERWRAP HD XL

SEMI-AUTOMATIC STRETCH WRAPPER

Semi-automatic rotary arm stretch wrapping machines are designed for unstable and heavy products.

- Easy to use intuitive color interface
- Easy film insertion system and 250% pre-stretch
- Industry 4.0, R-Connect ready



Performance features:



R-connect Ready

Provides usage and performance data via the cloud, putting performance monitoring & optimization at your fingertips. Utilization drastically reduces downtime by giving you informational transparency, allowing you to connect with your machines remotely to investigate alarms, adjust parameters, &

COLOR PANEL

New 3.5 inches control panel with color graphic display includes 6 programs that can be set.




PGS CARRIAGE

The PGS film carriage is fixed gear 250% power pre-stretch and the force to load (tension) is controlled by a strain gauge, adjusted on the control panel.



LAYOUT MASTERWRAP HD [inch]

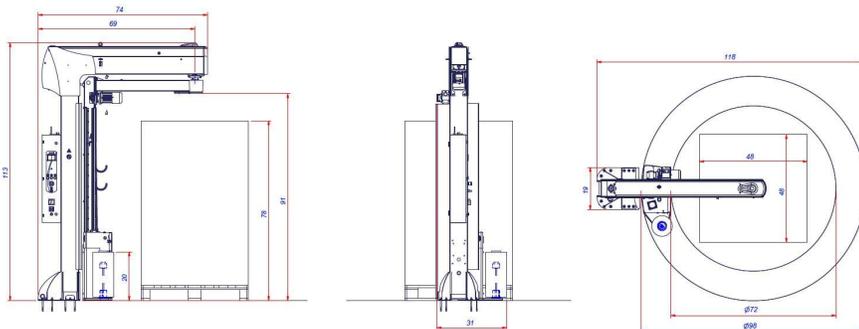

Masterwrap HD XL Specifications

Performance Criteria

Production Speed:

Up to 25 LPH

Wrap Arm Speed:

11 RPM

Load Capacity

Maximum Load Dimensions:

48" W x 48" L x 94" H

Maximum Load Weight:

Unlimited

Film Delivery System

- Fixed at 250%
- Height Sensing: Automatic photo eye
- Film Threading: Patented S-Pattern
- Standard Film Width – 20"

Operator Interface

- 3.5" Color LED and JOG Dial Programmable Selector
- 6 programmable wrapping menus

Safety Features

- Safety Bumper Warning Light
- Safety Alarm
- CE Compliant, UL, CUL

Utility Requirements

Voltage: 120V, 18.2 amps, 60 Hz, 1 PH

Warranty: 1 Year